

超硬ソリッド3枚刃

アルミ用

内径面取カッタ

YMKT

超硬


ねじれ角  
30°

外径公差  
0~-0.02

Inside Chamfering Cutters for Aluminum


BCMC

小径穴(φ1.4~φ4)の内径裏面取りが可能です

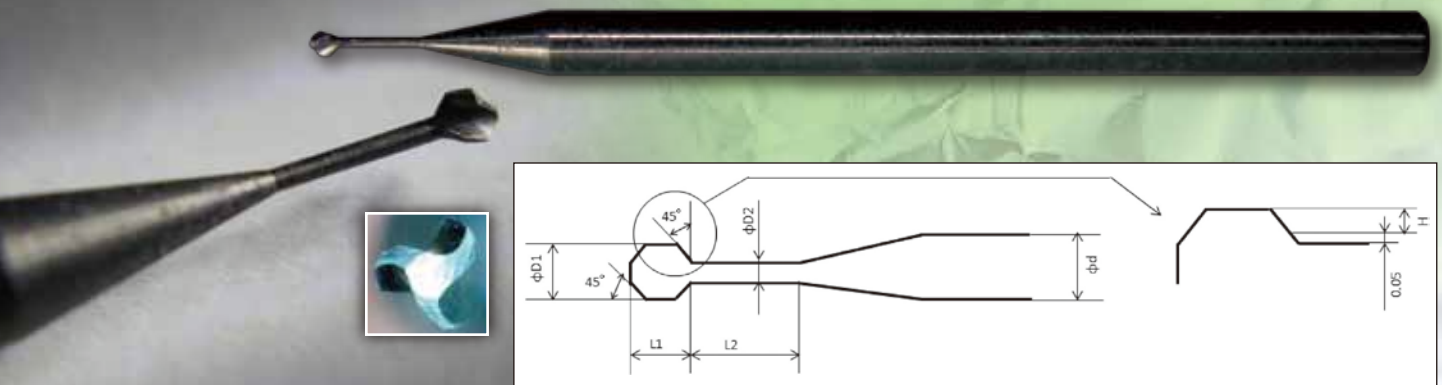

■アルミ用 内径面取りカッタ BCMC

ツール No. Tool No.	型番 Code No.	外径 D1	角度 Angle	L1	切刃長 H	首長 L2	首径 D2	全長 Overall Length	シャンク径 d	加工径 Cutting Range	価格(円) Price(¥)
YT22499	BCMC1.2X3.5X45°	1.2	45°	1.2	0.325	3.5	0.45	51	3	1.4~1.7	21,000
YT22500	BCMC1.2X5X45°	1.2	45°	1.2	0.325	5	0.45	51	3	1.4~1.7	21,340
YT22501	BCMC1.3X3.5X45°	1.3	45°	1.3	0.35	3.5	0.5	51	3	1.7~2	21,000
YT22502	BCMC1.3X5X45°	1.3	45°	1.3	0.35	5	0.5	51	3	1.7~2	21,340
YT22503	BCMC1.8X5X45°	1.8	45°	1.8	0.45	5	0.8	51	3	2.3~2.6	21,670
YT22504	BCMC2.4X10X45°	2.4	45°	2.4	0.65	10	1	51	3	3~4	22,000

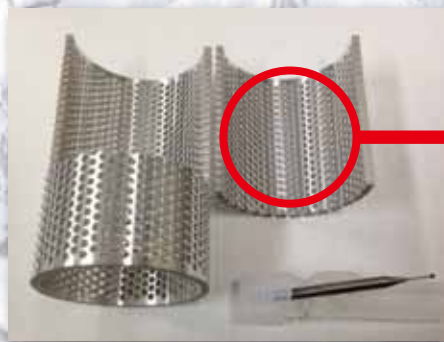

■ 切削条件 Recommended Milling Conditions

外径 D1 Flute Dia.	切削速度 (m/min)	回転数 (min <sup>-1</sup> )	1刃当りの 送り量 (mm/刃)	送り速度 (mm/min)	カット方向
1.2	20	7,700	0.01	231	ダウン
1.3	20	7,000	0.015	315	ダウン
1.8	30	7,300	0.015	329	ダウン
2.4	40	7,500	0.015	338	ダウン

TOOL COLLABORATION **YMKT**